

Flexible hoses

and connecting components

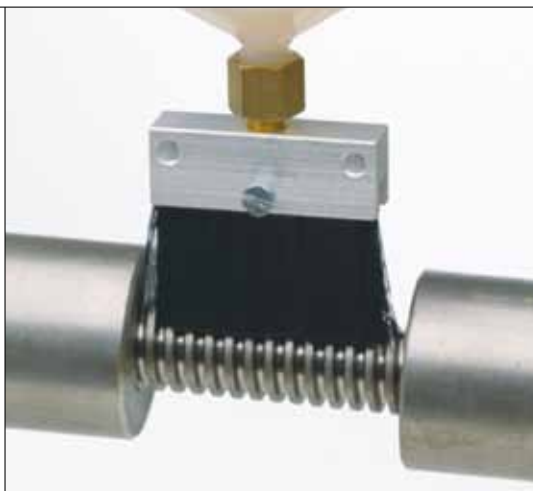
for greasing lines from lubrication system to lubrication point.







	Check valve Nickel-plated Viton seal Opening pressure min. 0,1 bar Operating pressure max. 10 bar	Male thread	Female thread	Thread length	Width across flats			Order no.		
		G 1/8	G 1/8	26	14			13854		
		G 1/4	G 1/4	32	17			13601		
		Female thread	Female thread	Thread length	Width across flats			Order no.		
G 1/8	G 1/8	50	19			14074				
G 1/4	G 1/4	50	19			14075				
G 1/2	G 1/2	63	25			14076				
	Hose connection kit empty, without grease - polyamide - polyethylene On request: filled with ALS greases	Hose outer/inner Ø mm	Hose length m	Screw in connection straight	Screw on connection straight	PA hoses Polyamide Ord. no.	PE hoses Polyethylene Ord. no.			
		8/6	0,5	G 1/4	G 1/4	13936	14136			
			1,0	G 1/4	G 1/4	14135	14137			
			1,5	G 1/4	G 1/4	14138	14141			
			2,0	G 1/4	G 1/4	14139	14140			
Other lengths and connections on request										
	Connecting pipe with two-sided male thread Stainless Steel	Male thread	Outer Ø	Length straight	90°-bend R 40 length		Ord. no.			
		G 1/4	13,5	30	-	12875				
				40	-	12876				
				60	-	12492				
				80	-	12493				
				100	-	12491				
				120	-	12872				
-	65/65		12490							
Other lengths on request										
	Seal rings Polyamide PA Aluminium	Polyamide	For thread	Temperat. up to °C	Outer Ø	Inner-Ø	Ring width	Ord. no.	per 100 pieces	
			G 1/8 + M10	90	13,8	10,3	1,5	13691		
			G 1/4	90	17	13,5	1,5	13152		
			G 3/8	90	21	16,7	1,5	13692		
		G 1/2	90	26	21,3	1,5	13693			
		Aluminium	G 1/8 + M10	120	14	10,3	1,5	14077		
			G 1/4	120	17,5	13,5	1,5	13949		
			G 3/8	120	21	16,7	1,5	14078		
G 1/2	120		25	21,3	1,5	14079				
	Flexible hose, plastic	Outer/Inner Ø mm	Minimum bend radius mm	Admissible working pressure in bar at temperature				Per 1 m hose length Ord. no.	Per 50 m coil Ord. no.	
				20 °C	30 °C	60 °C	80 °C			
		Polyamide PA	6/4	30	26	22	14	11	12419	12420
			8/6	40	19	16	10	8	12814	12815
			10/8	60	15	12,5	8	6	13813	14080
		Polyethylene PE	6/4	30	13	10	5,5	3,5	12421	12422
			8/6	40	8	6	3,2	2	12816	12817
10/8	60		6	4,5	2,5	1,5	14081	14082		

Brush and roller brush lubrication

Ideal for the lubrication of slideways, wire ropes, chains, belts.



	<p>Round brush Thread G 1/8. Brass socket. Bristles made of – horsehair – perlon – stainless steel</p>	<table border="1"> <thead> <tr> <th>Brush Ø mm</th> <th>Horsehair bristles Ord. no.</th> <th>Perlon bristles applications up to 70 °C Ord. no.</th> <th>Stainless steel bristles applications over 70 °C Ord. no.</th> </tr> </thead> <tbody> <tr> <td>6,5</td> <td>13898</td> <td>12522</td> <td>12930</td> </tr> <tr> <td>16</td> <td>13899</td> <td>12519</td> <td>12927</td> </tr> <tr> <td>25</td> <td>13900</td> <td>12520</td> <td>12928</td> </tr> <tr> <td>30</td> <td>13901</td> <td>12521</td> <td>12929</td> </tr> </tbody> </table>	Brush Ø mm	Horsehair bristles Ord. no.	Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.	6,5	13898	12522	12930	16	13899	12519	12927	25	13900	12520	12928	30	13901	12521	12929																														
Brush Ø mm	Horsehair bristles Ord. no.	Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.																																																	
6,5	13898	12522	12930																																																	
16	13899	12519	12927																																																	
25	13900	12520	12928																																																	
30	13901	12521	12929																																																	
	<p>Flat brush Thread G 1/8. Alu socket. Bristles made of – horsehair – perlon – stainless steel</p>	<table border="1"> <thead> <tr> <th>Brush width mm</th> <th>Horsehair bristles Ord. no.</th> <th>Perlon bristles applications up to 70 °C Ord. no.</th> <th>Stainless steel bristles applications over 70 °C Ord. no.</th> </tr> </thead> <tbody> <tr> <td>57</td> <td>13651</td> <td>12517</td> <td>13283</td> </tr> <tr> <td>114</td> <td>13652</td> <td>12514</td> <td>13626</td> </tr> <tr> <td>171</td> <td>13653</td> <td>12515</td> <td>13644</td> </tr> </tbody> </table>	Brush width mm	Horsehair bristles Ord. no.	Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.	57	13651	12517	13283	114	13652	12514	13626	171	13653	12515	13644																																		
Brush width mm	Horsehair bristles Ord. no.	Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.																																																	
57	13651	12517	13283																																																	
114	13652	12514	13626																																																	
171	13653	12515	13644																																																	
	<p>Flat brush Thread G 1/4. Plastic socket. Bristles made of – horsehair</p>	<table border="1"> <thead> <tr> <th>Brush width mm</th> <th>Horsehair bristles Ord. no.</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>12516</td> </tr> <tr> <td>60</td> <td>12518</td> </tr> <tr> <td>100</td> <td>12513</td> </tr> </tbody> </table>	Brush width mm	Horsehair bristles Ord. no.	40	12516	60	12518	100	12513		<div style="border: 1px solid black; padding: 5px; text-align: center;"> <p>Gear wheel and gear rack lubrication as well as lubrication felts on page 32</p> </div>																																								
Brush width mm	Horsehair bristles Ord. no.																																																			
40	12516																																																			
60	12518																																																			
100	12513																																																			
	<p>Roller brush Adjustable fastening. The roller brush is supplied with lubricant from within the axis.</p>	<table border="1"> <thead> <tr> <th colspan="3">Roller brush dimensions</th> <th rowspan="2">Perlon bristles applications up to 70 °C Ord. no.</th> <th rowspan="2">Stainless steel bristles applications over 70 °C Ord. no.</th> </tr> <tr> <th>Width mm</th> <th>Ø mm</th> <th>Axis length mm</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>60</td> <td>74</td> <td>13629</td> <td>13636</td> </tr> <tr> <td>25</td> <td>60</td> <td>82</td> <td>13630</td> <td>13637</td> </tr> <tr> <td>30</td> <td>60</td> <td>91</td> <td>13631</td> <td>13638</td> </tr> <tr> <td>40</td> <td>60</td> <td>99</td> <td>13575</td> <td>13639</td> </tr> <tr> <td>20</td> <td>80</td> <td>74</td> <td>13632</td> <td>13640</td> </tr> <tr> <td>25</td> <td>80</td> <td>82</td> <td>13633</td> <td>13641</td> </tr> <tr> <td>30</td> <td>80</td> <td>91</td> <td>13634</td> <td>13642</td> </tr> <tr> <td>40</td> <td>80</td> <td>99</td> <td>13635</td> <td>13643</td> </tr> </tbody> </table>	Roller brush dimensions			Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.	Width mm	Ø mm	Axis length mm	20	60	74	13629	13636	25	60	82	13630	13637	30	60	91	13631	13638	40	60	99	13575	13639	20	80	74	13632	13640	25	80	82	13633	13641	30	80	91	13634	13642	40	80	99	13635	13643		
Roller brush dimensions			Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.																																																
Width mm	Ø mm	Axis length mm																																																		
20	60	74	13629	13636																																																
25	60	82	13630	13637																																																
30	60	91	13631	13638																																																
40	60	99	13575	13639																																																
20	80	74	13632	13640																																																
25	80	82	13633	13641																																																
30	80	91	13634	13642																																																
40	80	99	13635	13643																																																
	<p>Roller brush Adjustable fastening. The roller brush is lubricated through drop lubrication from above. Bristles made of – perlon – stainless steel.</p>	<table border="1"> <thead> <tr> <th colspan="3">Roller brush dimensions</th> <th rowspan="2">Perlon bristles applications up to 70 °C Ord. no.</th> <th rowspan="2">Stainless steel bristles applications over 70 °C Ord. no.</th> </tr> <tr> <th>Width mm</th> <th>Ø mm</th> <th>Height mm</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>80</td> <td>137</td> <td>13628</td> <td>13627</td> </tr> </tbody> </table>	Roller brush dimensions			Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.	Width mm	Ø mm	Height mm	25	80	137	13628	13627																																					
Roller brush dimensions			Perlon bristles applications up to 70 °C Ord. no.	Stainless steel bristles applications over 70 °C Ord. no.																																																
Width mm	Ø mm	Height mm																																																		
25	80	137	13628	13627																																																