

Grease guns

Pneumatic lubrication,
manual or with accumulator

Accessories: nozzles, couplers, greasing
nipples, hoses, lubricants

Pages
38–41

Battery-powered grease gun in heavy-duty case



The Power-Luber is a battery operated grease gun especially designed for hard to reach fittings and single lubrication points that have to be greased manually.

Technical data

Power-Luber 14,4 V DC drive
 Pressure up to 482 bar
 Output ca. 240 g/min at 69 bar
 Container for 400 g standard grease cartridges or direct filling
 Battery Ni-Cd battery 14,4 V
 Power 1700 mAh
 Weight Gun 3,4 kg, case cpl. 7,4 kg

(Picture may vary from original)

	Power-Luber-Kit in case	Extra battery Ni-Cd 14,4 V
Ord.no.	14514	14515

Power-Luber-Kit case with contents:
 Grease gun with Ni-Cd battery 14,4 V and charger. Flexible hose, length ca. 760 mm.
 Hydraulic nozzle. Without cartridges.



Pneumatic grease guns



This grease gun is suitable for greases up to NLGI grade 2 and can be filled with either cartridges or bulk grease.


It is especially handy due to its contoured plunger, tight fitting and safe handle on the plunger rod. 4 different models available. For greases up to NLGI grade 2.

Technical data

Transmission ratio 50 : 1
 Recommended air pressure 2–8 bar
 Operating pressure 6 bar
 Output per stroke ca. 0,8 cm³
 Content 500 cm³
 Connecting thread M 10 x 1
 Piston Ø 6 mm

Pneumatic grease guns	Ord. no.
"Standard" Nozzle tube, angled, 150 mm. 4-jaw hydraulic coupler.	12773
"Plus" High-pressure hose 11 x 300 mm. 4-jaw hydraulic coupler, filling nipple.	12772
"Combi" with high-pressure hose 8 x 300 mm and nozzle tube, angled. 2 x 4-jaw hydraulic coupler. Filling nipple.	12771
"Automatic" Continuous grease output. Nozzle tube, 4-jaw-hydraulic coupler. Filling nipple.	12770

One-handed grease guns

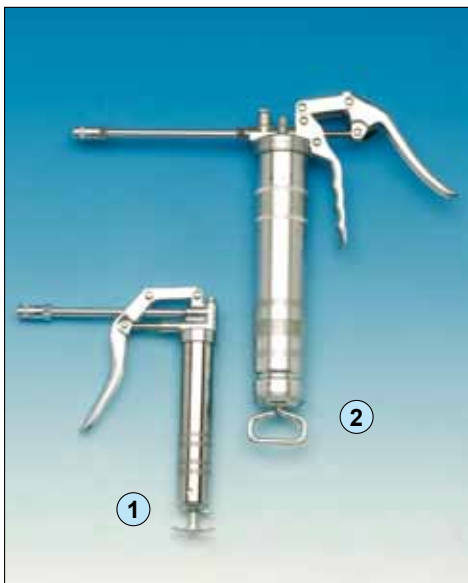

One-handed grease guns are especially suitable for all lubricating points on machines and

vehicles that are equipped with hydraulic type lubricating nipples (DIN 71412).

①

TG 120

This solid one hand operated grease gun works with greases up to NLGI grade 2. It is equipped with a straight nozzle tube and a 4-jaw-hydraulic coupler. R 1/8. Capacity 130 cm³, operating pressure 200 bar, 2 thread connections (horizontal or vertical).

Ord.no.

14003

②

TG 500 S

One hand operated grease gun for 400 g cartridges or bulk grease with filling nipple and vent nipple. Operating pressure 300 bar, for greases up to NLGI-grade 2, with nozzle tube and 2 thread connections (horizontal or vertical).

TG 500 S
Connection M 10 x 1

Ord.no.

14001

TG 500 S
Connection R 1/8

Ord.no.

14002

Hand lever grease gun for grease and oil

For grease. Automatic venting nipple. Reinforced handle. The precision pumpwork performs a minimum working pressure of 400 bar and delivers 1,4 ml per stroke. For bulk grease or cartridges. TÜV and DLG approved.

For fluid greases and low viscosity fluids. Delivery pressure 400 bar. High-quality sealing collar. Capacity: 500 cm³.

Not suitable for cartridges.

Thread	M 10 x 1	R ½	Thread	M 10 x 1	R ½
Ord.no.	12750	12751	Ord.no.	12762	12763

High-pressure hoses

Connection	Max. pressure	Hose length	Thread	Ord.no.
4-jaw hydraulic coupler	1000 bar	300 mm	M 10 x 1	12752
		300 mm	R ½	12754
		500 mm	M 10 x 1	12753
		500 mm	R ½	12755

Accessories kit for grease guns

Sturdy steel sheet box.
All connecting threads M 10 x1

2 pieces 4 jaw hydraulic grip head, hardened, for H grease nipples	1 piece elbow 90°, fits on hydraulic nozzle
1 piece universal nozzle for K grease nipples	1 piece extension button head coupler, fits on all hydraulic nozzles
1 piece pointed nozzle for D grease nipple	1 piece reducer G ½ to M 10 x 1, female thread
1 piece Button head coupler 16 mm for M-1 grease nipples	1 set grease nipples, 3 pieces each
1 piece high-pressure hose 300 mm	H 1: M 6 x 1, M 8 x 1, M 10 x 1 and G ½
3 pieces nozzle tubes 150 mm angled	H 2: M 6 x 1 and M 8 x 1
1 piece nozzle tube 150 mm straight	
	Ord.no. 12749






High-pressure push guns

Made of steel. For grease and oil. 3 sizes with 2 nozzles each.

Application	Push gun- Ø x length mm	with pointed nozzle for nipple DIN 3405 and universal nozzle for nipple DIN 71412, connecting thread M 10 x1	Ord.no.
For grease	37 x 220		12758 PT 150
	47 x 260		12760 PT 300
For oil and petroleum	40 x 150		12766 PO 150



Greasing accessories – nozzles • offer on next page

		
4 jaw hydraulic coupler, hydraulic type greasing nipple	Button head coupler with button head greasing nipple	Pointed nozzle with flush type greasing nipple